


# FAS380VS-3



## MATERIAL GROUPS



## CHARACTERISTICS







THREADING SOLUTIONS

[watch online](#)

TECHNICAL DRAWING

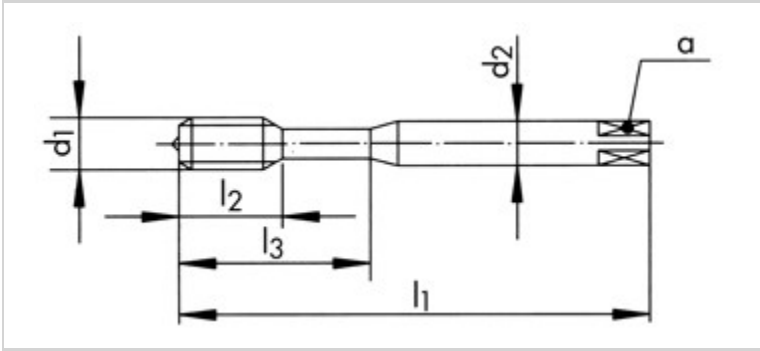

PROFILE SKETCH

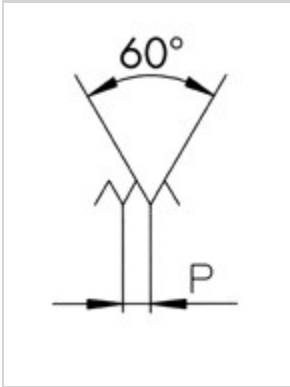

TOOL DATA

| ID     | D <sub>1</sub> | Ø D <sub>1</sub> | TOL | P     | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | D <sub>2</sub> | A   |  |  |
|--------|----------------|------------------|-----|-------|----------------|----------------|----------------|----------------|-----|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 170611 | M6             | 6.00             | 6HX | 1.000 | 80.0           | 17.0           | 30             | 6.00           | 4.9 | 4                                                                                   | 5.55                                                                                |

PRODUCT RANGE FAS380VS-3 M6 6HX

| ID     | D <sub>1</sub> | Ø D <sub>1</sub> | TOL | P     | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | D <sub>2</sub> | A   |  |  |
|--------|----------------|------------------|-----|-------|----------------|----------------|----------------|----------------|-----|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 170603 | M3             | 3.00             | 6HX | 0.500 | 56.0           | 12.0           | 18             | 3.50           | 2.7 | 3                                                                                     | 2.80                                                                                  |
| 170605 | M3.5           | 3.50             | 6HX | 0.600 | 56.0           | 13.0           | 20             | 4.00           | 3.0 | 3                                                                                     | 3.25                                                                                  |
| 170607 | M4             | 4.00             | 6HX | 0.700 | 63.0           | 14.0           | 21             | 4.50           | 3.4 | 3                                                                                     | 3.70                                                                                  |
| 170609 | M5             | 5.00             | 6HX | 0.800 | 70.0           | 15.0           | 25             | 6.00           | 4.9 | 4                                                                                     | 4.65                                                                                  |
| 170611 | M6             | 6.00             | 6HX | 1.000 | 80.0           | 17.0           | 30             | 6.00           | 4.9 | 4                                                                                     | 5.55                                                                                  |
| 170616 | M8             | 8.00             | 6HX | 1.250 | 90.0           | 20.0           | 35             | 8.00           | 6.2 | 4                                                                                     | 7.40                                                                                  |
| 170618 | M10            | 10.00            | 6HX | 1.500 | 100.0          | 22.0           | 39             | 10.00          | 8.0 | 5                                                                                     | 9.30                                                                                  |