


# TL351VS-3



## MATERIAL GROUPS



## CHARACTERISTICS







THREADING SOLUTIONS

[watch online](#)

TECHNICAL DRAWING

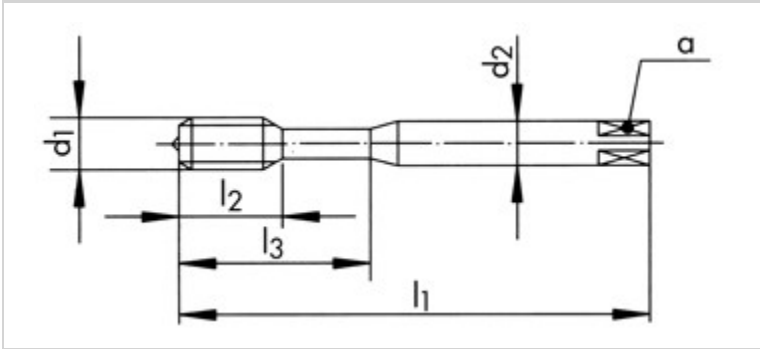

PROFILE SKETCH

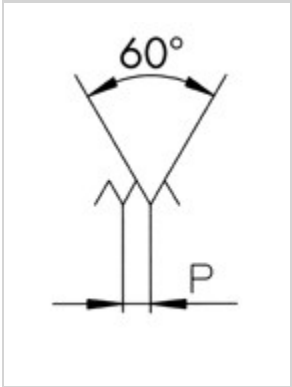

TOOL DATA

| ID     | D <sub>1</sub> | Ø D <sub>1</sub> | TOL | P     | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | D <sub>2</sub> | A   |  |  |
|--------|----------------|------------------|-----|-------|----------------|----------------|----------------|----------------|-----|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 152015 | M6             | 6.00             | 4HX | 1.000 | 80.0           | 15.0           | 23             | 6.00           | 4.9 | 3                                                                                   | 5.00                                                                                |

PRODUCT RANGE TL351VS-3 M6 4HX

| ID     | D <sub>1</sub> | Ø D <sub>1</sub> | TOL | P     | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | D <sub>2</sub> | A   |  |  |
|--------|----------------|------------------|-----|-------|----------------|----------------|----------------|----------------|-----|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 148000 | M3             | 3.00             | 6HX | 0.500 | 56.0           | 12.0           | 0              | 3.50           | 2.7 | 3                                                                                     | 2.50                                                                                  |
| 152012 | M3             | 3.00             | 4HX | 0.500 | 56.0           | 12.0           | 0              | 3.50           | 2.7 | 3                                                                                     | 2.50                                                                                  |
| 152013 | M4             | 4.00             | 4HX | 0.700 | 63.0           | 14.0           | 0              | 4.50           | 3.4 | 3                                                                                     | 3.30                                                                                  |
| 148002 | M4             | 4.00             | 6HX | 0.700 | 63.0           | 14.0           | 0              | 4.50           | 3.4 | 3                                                                                     | 3.30                                                                                  |
| 148006 | M5             | 5.00             | 6HX | 0.800 | 70.0           | 15.0           | 0              | 6.00           | 4.9 | 3                                                                                     | 4.20                                                                                  |
| 152014 | M5             | 5.00             | 4HX | 0.800 | 70.0           | 15.0           | 0              | 6.00           | 4.9 | 3                                                                                     | 4.20                                                                                  |
| 152015 | M6             | 6.00             | 4HX | 1.000 | 80.0           | 15.0           | 23             | 6.00           | 4.9 | 3                                                                                     | 5.00                                                                                  |
| 148010 | M6             | 6.00             | 6HX | 1.000 | 80.0           | 15.0           | 23             | 6.00           | 4.9 | 3                                                                                     | 5.00                                                                                  |
| 152016 | M8             | 8.00             | 4HX | 1.250 | 90.0           | 18.0           | 29             | 8.00           | 6.2 | 3                                                                                     | 6.70                                                                                  |
| 148018 | M8             | 8.00             | 6HX | 1.250 | 90.0           | 18.0           | 29             | 8.00           | 6.2 | 3                                                                                     | 6.80                                                                                  |
| 148025 | M10            | 10.00            | 6HX | 1.500 | 100.0          | 20.0           | 33             | 10.00          | 8.0 | 3                                                                                     | 8.50                                                                                  |
| 152017 | M10            | 10.00            | 4HX | 1.500 | 100.0          | 20.0           | 33             | 10.00          | 8.0 | 3                                                                                     | 8.50                                                                                  |



[watch online](#)